Using 62443 Certification to Lower HoT Cybersecurity Risk

October 27, 2021



Speakers



Dan DesRuisseaux possesses over 25 years of diverse experience in engineering, sales, and marketing roles in high tech companies. Mr.

DesRuisseaux presently serves as the Cybersecurity Program Director for Schneider Electric's Industrial Division. In this role he works to insure the proper and consistent implementation of security features across SE's diverse product portfolio. He also identifies and fills security gaps by forging partnerships with best-in-class security appliance companies. Mr. DesRuisseaux is also the marketing Chairman of the ISA Security Compliance Institute - a non-profit organization seeking to improve ICS security through standards compliance.



In over 25 years in the cyber security field, Carol **Muehrcke** has led security assurance teams for high assurance products, software development teams for both commercial and government security products, research programs on assurance methods and security mechanisms, and industry working groups on cyber security. Starting in 2008 she has worked with the ISA Security Compliance Institute to manage, develop and roll out certification programs for control systems, control system components, and secure product development life cycle. Recently she has led ISA Global Cybersecurity Alliance teams to study Industrial Internet of Things product certifications and cross references of other standards with 62443. She was a contributing author to the process control cyber security standard ISA-62443-2-1-2009.



Agenda

Problem – IIoT Cybersecurity Risk

Approach – IIoT Cybersecurity Certification

Recommendations

Next steps



Problem: IIoT Security Risk

Urgent need overcomes potential cybersecurity risk



Asset owners creating their own procurement criteria, would prefer standards-based certification



Agenda

Problem – IIoT Cybersecurity Risk

Approach – IIoT Cybersecurity Certification

Recommendations

Next steps



Industry Driving IIoT Product Certification

Study initiated to accelerate the availability of a vetted 62443 based IIoT product certification (Link)

- Identify gaps in current 62443 certifications
- Recommend next steps for creation of IIoT product certification









)KAF I

Study Methodology

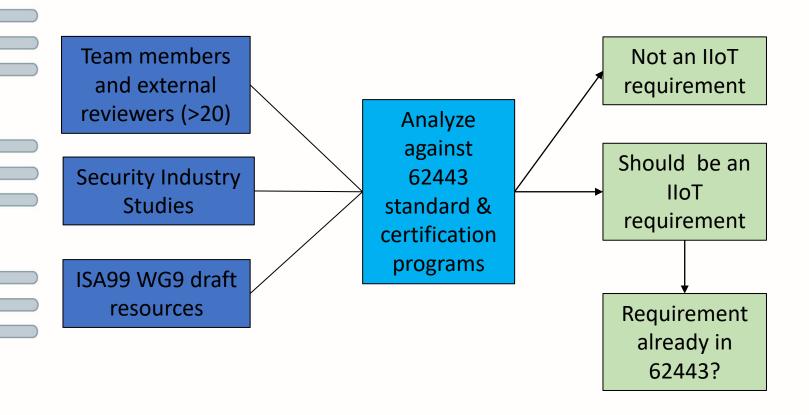



ISAGCA/ISCI Study Scope

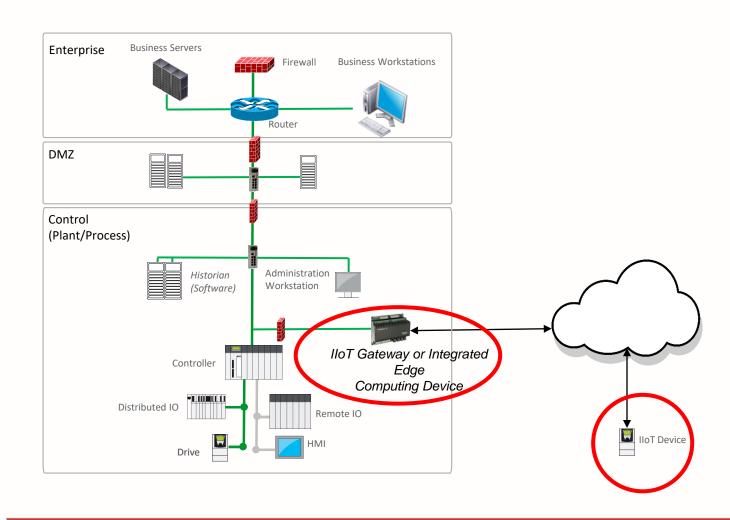



Agenda

Problem – IIoT Cybersecurity Risk

Approach – IIoT Cybersecurity Certification

Recommendations

Next steps



Recommendation – Adjust 62443 Certification Criteria

Existing certifications cover ~90% of desired criteria for IIoT certification

To achieve the 10%:

- Add certification requirements
- Remove some existing requirements
- Refine evaluation methods for existing requirements
- Create two certification tiers instead of four security levels

The study makes recommendations; but does not itself constitute a certification program



MALI

Add Functional Requirements

Functional Requirement	Rationale
Compartmentalization (5 sub requirements)	Limit effect of breaches, more frequent from untrusted networks
Supplier root of trust in hardware	Commonly accepted to protect basis for component integrity
Secure by default	Address management and risk for at-scale deployments
Unique per device, initial passwords/keys (D*)	Address management and risk for at-scale deployments
Authentication of non-human users from untrusted networks	Connection to untrusted network, non-human attackers of all intentions
Protection from untrusted management traffic	Management interface is lethal attack vector and often overlooked
Turn off untrusted network connection, maintain essential functions (D*)	Turning off this connection is common response to incident
Remote update and upgrade	Devices in remote physical locations, potentially at-scale
Update/upgrade maintains security settings	Practical management at-scale, given frequent updates/upgrades
Enable/disable update and upgrade	Enable asset owner management of change
Protect software and data in use (with hardware for Advanced Tier)	Sophistication of attackers increases attacks on data in use
No silk screen (D*) (Advanced Tier)	Basic countermeasure against reverse engineering
Presence of component can be monitored (Advanced Tier)	Damage, theft due to small size, unprotected location





Remove Functional Requirements

62443-4-2 Reference	62443-4-2 requirement	Rationale for not including
CR 1.7 RE(1)	Password generation and lifetime restrictions for human users	Periodic password change no longer considered best practice
CR 2.1 RE(3)	Supervisor override	Not useful for limited device functionality, introduces risk
CR 2.1 RE(4)	Dual approval	Not used in many cases
CR 3.9 RE(1)	Audit records on write-once media	Records typically sent to other systems



Refine Evaluation Methods - Functional Requirements

	62443-4-2 Reference	Evaluation Refinement	Rationale
	NDR 5.2, CR 4.1	Evaluate zone requirements internal to component	Use of co-location architectures
	CR 1.1, 1.9, 3.4, 3.4 RE(1)	Acceptable use of untrusted network for security functions	Availability a concern
	EDR HDR NDR 3.14, 3.14 RE(1)	Protect boot process given attacker physical possession of component	Unprotected physical location
	CR 1.5D	Protect authenticators given attacker physical possession of component	Unprotected physical location
	CR 6.2	Use commonly accepted interfaces for reporting continuous monitoring	Support use of best analysis tools
	CR 7.1	DoS protection for loss of cloud functionality or untrusted connection	Common occurrence for IIoT
	CR 7.4	Recovery after failed update/upgrade	Small window before attackers locate opportunity
3.1 RE(1), 3.4, confidentiality/integrity, use cryptographic methods definition		Increase user confidence, drive definition of commonly accepted, move industry forward	



Unprotected Physical Location





http://energy-cg.com/EandP_pics/DeepWaterSemi-GulfOfMexico-BOEMOPA.jpg

JKAFI

Add Lifecycle Requirements

	Lifecycle Requirement	Rationale		
	Add design practice for zone partitioning internal to components (compartmentalization)	Address threats previously addressed by network segmentation		
Ī	Include related cloud supplier in security design review Verify assumptions about system security			
	Receive security notifications from related cloud supplier	Enable related actions/mitigations for component user		
	Provide user documentation of cloud dependencies, including ongoing traffic over untrusted network	Distinguish attacks from normal operation; assess ongoing risk		
	User documentation describes physical elements	Assess risks of function co-location		
Proactive notification of update/upgrade availability Advance notification of withdrawal from security update process		Shorten vulnerability window		
		Shorter lifecycle for IIo1 components than general control system components; greater exposure if unable to replace in time		



Refine Evaluation Methods - Lifecycle Requirements

62443-4-1 Reference	Lifecycle Requirement - Evaluation Refinement	Rationale	
SR-1	Security context incorporates IIoT elements	Recognize unique threats	
SR-2	Threat model incorporates device failures	Small window before attackers locate opportunity	
SR-2	Threat model incorporates shared resources hetween functions	Use of co-location architectures	
SUM-5	Periodic review of maintenance of security	Increase focus on lifecycle vs. point-in-time security	



62443 Capability Security Levels to IIoT Tiers

	Security Level (SL-C)	Definition	Means	Resources	Skills	Motivation
	1	Protection against casual or coincidental violation				
lloT	2	Protection against intentional violation using simple means with low resources, generic skills and low motivation	simple	low	generic	low
	3	Protection against intentional violation using sophisticated means with moderate resources, IACS specific skills and moderate motivation	sophisticated	moderate	IACS specific	moderate
	4	Protection against intentional violation using sophisticated means with extended resources, IACS specific skills and high motivation	sophisticated	extended	IACS specific	high




Advanced

Tier

Core Tier

Functional Requirements by IIoT Tier

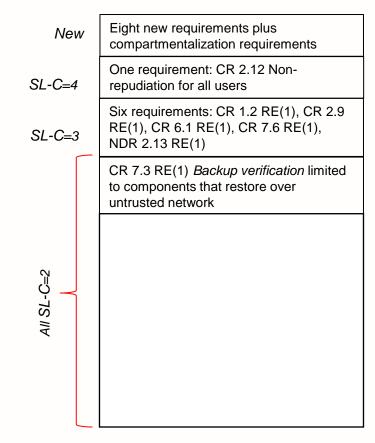

Core Tier New, plus three additional new requirements: presence/absence of New component can be monitored, hardware protection for security functions and software/data in use Remove: CR 1.7 RE(1), CR 2.1 RE(3), CR 2.1 RE(4), CR 3.9 RE(1) 4// SL-C=4



IIoT Gateway Advanced Tier Functional Requirements



Agenda

Problem – IIoT Cybersecurity Risk

Approach – IIoT Cybersecurity Certification

Recommendations

Next steps



Next steps

Recommend consideration by

- 62443 standards organization ISA99
- 62443 certification scheme owners

Next phase of study targeting IIoT systems

- Cloud based functionality
- Edge functionality



Questions?



ISA Global CS Alliance

The objectives of the ISA Global Cybersecurity Alliance include the acceleration and expansion of standards, certification, education programs, advocacy efforts, and thought leadership. Members:

Schneider Electric Rockwell Automation Honeywell

Johnson Controls

Claroty

Nozomi Networks

PAS

txOne Networks

Xage Security

Wallix

Bayshore

Senhasegura

Radiflow exida

Munio Security
Digital Immunity

Tripwire Dragos

Idaho National Labs

TiSafe

ae Solutions

Mission Secure Inc

WisePlant

Tenable

Acet Solutions

1898 co Cyberowl

Logiic

ISASecure Nova Systems

Deloitte

Console Works

Eaton KPMG

Surge Engineering

Petronas

UL

Idaho State University

Johns Manville Red Trident Inc

Xylem Baserock

Cyphy Defense

Coontec Fortinet



ISASecure

ISASecure's mission is to decrease the time, cost, and risk of developing, acquiring, and deploying control systems by establishing a collaborative industry-based program among asset owners, suppliers, and other stakeholders. Members:

Chevron

ExxonMobil

Saudi Aramco

Shell

Honeywell

Johnson Controls

Schneider Electric

Yokogawa

Applied Risk

CSA Group

DNV-GL

FM Approvals

exida

Bureau Veritas

Security Compass

SGS ESPANOLA DE CONTROL

Synopsys

TUV Rheinland

TUV SUD

TrustCB

YPF S. A.

HON Consulting S.r.l dba BYHON

Control System Security Center

